

Unbiased recurrence plot quantification of chaotic dynamic systems by eliminating sojourn points

Amira Zaylaa, Jean-Marc Girault, Jamal Charara

► **To cite this version:**

Amira Zaylaa, Jean-Marc Girault, Jamal Charara. Unbiased recurrence plot quantification of chaotic dynamic systems by eliminating sojourn points. 2nd International Conference on Advances in Biomedical Engineering, Sep 2013, Tripoli, Lebanon. pp.187 - 190, 2013, <10.1109/ICABME.2013.6648879>. <inserm-01075584>

HAL Id: inserm-01075584

<http://www.hal.inserm.fr/inserm-01075584>

Submitted on 18 Oct 2014

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Unbiased Recurrence Plot Quantification Of Chaotic Dynamic Systems By Eliminating Sojourn Points

Amira Zaylaa
and Jean-Marc Girault

Imaging and Brain Laboratory,
School of Medicine

UMR Inserm U930, Université François-Rabelais de Tours,
PRES Centre-Val de Loire Université, Tours, France
Email: amira.zaylaa@inserm.fr, jean-marc.girault@univ-tours.fr

Amira Zaylaa
and Jamal Charara

Signal and Image Laboratory, Faculty of Sciences,
Lebanese University, Hadath, Lebanon

Email: amira.zaylaa@ul.edu.lb, jcharara@ul.edu.lb

Abstract—Recurrence plots are nonlinear tools used to visualize the behavior of trajectories of Dynamic Systems. Occurrence of false points known as 'sojourn points' have biased recurrence plots. To solve this contentious issue, the use of high embedding dimension was proposed. However it required a lot of computation and was based on the phase space. For that, we proposed in this paper to compare four quantification techniques, by dropping out sojourn points from the recurrence test of time series. Firstly, a recurrence plot and embedding of two were used as reference methods. Secondly, the number of points in the pattern used for testing recurrences was increased and a m-pattern recurrence plot was introduced. Thirdly, a single system's output and its corresponding derivative were proposed. Numerical inference showed that it was sufficient to work on a single measurement regardless of the degrees of freedom of the considered system and thus the embedding dimension. The proposed techniques succeeded in eliminating sojourn points. They provided a tool for a clean unbiased recurrence plots which permits better analysis of chaotic dynamic systems.

Index Terms—Chaotic systems and signals, Recurrence Plot, m-Pattern Recurrence Plot, Derivative-Based Recurrence Plot, Sojourn points.

I. INTRODUCTION

Recurrence plots (RPs) are popular nonlinear tools for featuring recurring patterns in chaotic systems and signals, thanks to their simple use [1], [2]. Such representation, enables to visualize in 2-Dimension, the recurrences of D-dimensional patterns. This could be achieved by computing a distance norm between two neighbouring points in d-dimensional embedded space, or between d-embedded signals, at two different instants of time. Based on the knowledge of the time-series, merely, two preliminary steps are required to reconstruct the RP: the first is looking the d-dimension of the embedded system out, while the second is looking the time-delay out between d-signals that ensures their independence. The previous steps were well-known as Taken's theorem [1], [2]. One could wonder if this heavy procedure could be simplified, as the core information is solely present in the time-series. A certain number of researchers investigated the possibility of directly working on the original time-series i.e. in $d = 1$. However, the simplified assumption have biased the RP representation and its corresponding recurrence quantification analysis (RQA) [3].

This drawback have triggered the presence of false recurrences (or sojourn points) which were, for instance, identified by N. Marwan [3]. The correct analysis of recurrences from time-series is accompanied with sojourn points and is based probably on embedding dimensions [3], [4], [5]. One could wonder about the optimal embedding dimension, which removes sufficiently false recurrences to obtain unbiased recurrence quantification. A question could flush to minds: Are there another methods capable of supplying unbiased quantification?

To answer the previous question, we aimed to correctly remove false recurrence points, in order to obtain unbiased RQA. We proposed to compare four techniques, to obtain unbiased recurrence quantification. We worked on RP (without embedding) and (RP₂) with fixed embedding dimension (d=2). Then we worked on what we called Derivative-Based Recurrence Plot (RP₃) and m-time Pattern Recurrence Plot (RP₄). Through this work, the sine and triangular waves were considered for illustration. To mimic chaotic biomedical systems we worked on the time-series derived from the logistic map.

The originality of the proposed work lies behind the fact that techniques permitting unbiased quantification of RP, could be investigated regardless of the degrees of freedom of the dynamic system.

II. NONLINEAR ANALYSIS METHODS

A. Recurrence Plots and Sojourn Points

In order to illustrate the recurrence test on a single time series we introduced some simulations and reported them in Fig. 1. Fig. 1 represented a schema of (a) a sine wave, $x(t)$, its time delayed version, $y(t) = x(t + T/4)$, their circular phase space ($x(t)$ versus $y(t)$), (b) a sine wave, $x(t)$, its derivative, $\dot{x}(t)$, their circular phase space ($x(t)$ versus $\dot{x}(t)$), (c) a triangular wave $x(t)$, its time delayed version $y(t) = x(t + T/4)$, their eight shaped rotated-square phase space and (d) a triangular wave $x(t)$, its derivative $\dot{x}(t)$, demi-square phase space.

To vividly understand how the recurrence test works out, recall that RP is a two-dimensional squared matrix with black and white dots and two time-axes, where each black dot at

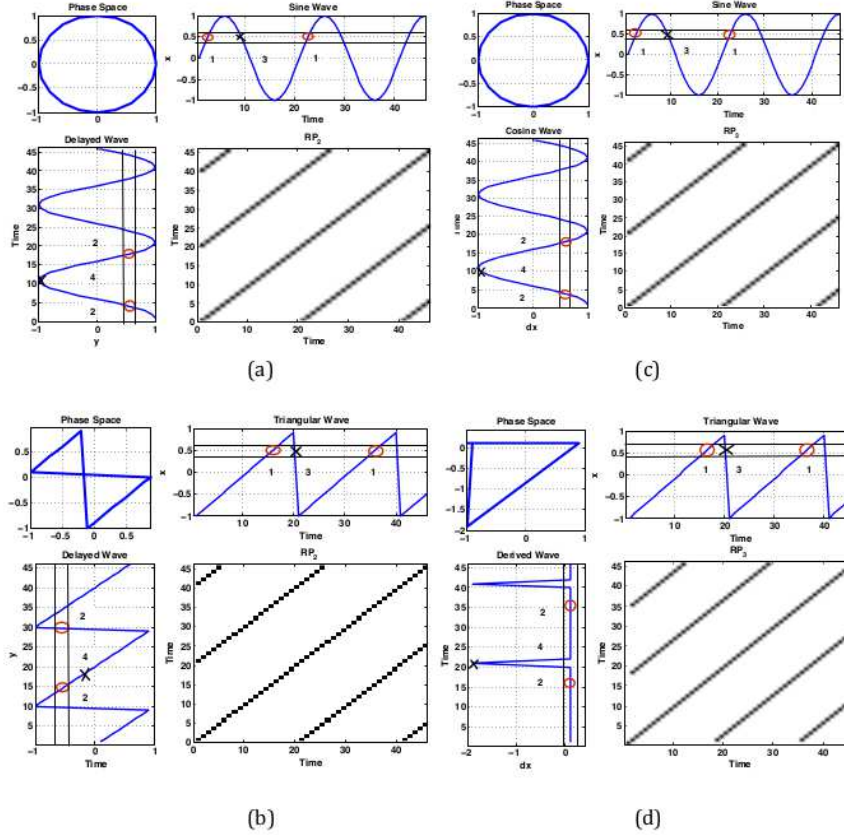


Fig. 1. Schematic illustration of Phase Space, Recurrence test computation of (a),(b) a sine and triangular waves $x(t)$ and $y = x(t + \tau)$ and (c),(d) a sine and triangular waves $x(t)$ and $y = \dot{x}(t)$.

the coordinates (i,j) represents a recurrence of the system's state \mathbf{X}_i with another state \mathbf{Y}_j . It is expressed, for a fixed embedding dimension d and threshold r , as :

$$\text{RP} = \Theta(r - \|\mathbf{X}_i - \mathbf{Y}_j\|), \quad \mathbf{X}_i \in \mathcal{R}^d, \quad (1)$$

where $\mathbf{X}_i \in \mathcal{R}^d$ stands for the point in phase space at which the system is situated at time i , $\Theta(\cdot)$ is the Heaviside function, $\|\cdot\|$ the L_∞ norm and $i, j = 1, \dots, N - d + 1$.

For any chaotic system with a single observation, one can reconstruct the RP for $\mathbf{Y}_j = \mathbf{X}_{i+\tau}$ based on two parameters, the time delay ' τ ' and d . Denote RP by RP_1 (without embedding).

Fig. 1 (a) pointed out the recurrence of the points denoted 1 and 3 (existing within the same slice). The problem was that 1's were true recurrences, however, 3 was a sojourn point. To eliminate the number of sojourn points a commonly used technique consisted in increasing the embedding dimension. We shortly denoted this throughout the paper by RP_2 . The recurrence test [3], [4], [5] involved in RP_2 was computed with $\mathbf{Y}_j = \mathbf{X}_{i+\tau}$. To schematize this, RP_2 was used in Fig. 1 (a). Within this figure and recalling that point 3 was not a true recurrence, points denoted as 1's in signal $x(t)$, corresponding to points denoted as 2's and marked as red circles in the delayed signal $y = x(t+\tau)$, have existed within the slice. But, the point denoted as 3 and marked as a red $x(t)$, corresponded

to a point denoted as 4 in signal $y(t)$. Since this point was not situated within the slice, it was not considered in the test. In this manner, it was vividly evident that 3 was a sojourn point. Note that RP_2 in Fig.1 (a) and (b) corresponding to $d = 2$ with $y = x(t + \tau)$, were similar for two different signals.

Instead of finding what was the best time delay τ and embedding dimension d that permit to reconstruct a topologically acceptable phase space and an unbiased RP, another approach discussed in the following section could be used.

B. Derivative-Based Recurrence Plot

The proposed Derivative-Based Recurrence Plots are based on the derivative of time-series. This approach neither requires searching for the time-delay nor embedding dimension. It was denoted by RP_3 for $\mathbf{Y}_j = \dot{\mathbf{X}}_i$. Note that in Fig. 1 (a) and (c), the following equation: $x(t + \tau) = \dot{x}(t)$ was verified, whereas, in (b) and (d) was not, i.e., $x(t + \tau) \neq \dot{x}(t)$. In Fig. 1 (c) and (d), points denoted by 1 occurred at the same level in the signal $\dot{x}(t)$ and possessed the same value, however, point 3 which corresponded to point 4 in signal $\dot{x}(t)$ occurred at different level. This vividly evidenced that point 3 was a sojourn point and should not be counted in the recurrence test.

Note that, though $\dot{x}(t)$ of the sine and triangular signals differ, the same quantification process was applicable. In Fig. 1 (c) and (d) the RP_3 were in general made up of five diagonal

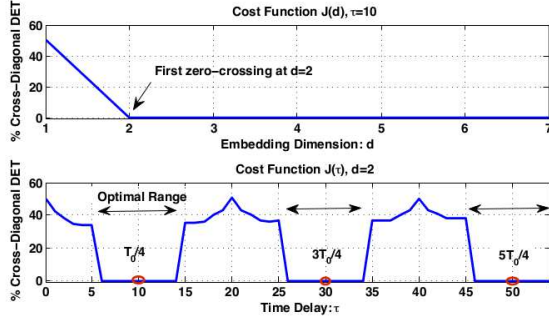


Fig. 2. The cost-function and optimization test of the embedding dimension and time delay.

structures, but as a zoom in, they started at different instants of time, this evidenced that the technique was sensitive to the derivative of the signal solely.

Although this method requires two signals, it is not an embedding process, since the embedding process requires the minimization of the mutual information, while RP_3 requires the minimization of the number of sojourn points.

C. m-Pattern Recurrence Plot

Based on the previous method, it was essential to have additional information on the recurrence test. For that, m-Pattern Recurrence Plot was introduced. Instead of considering a point-point recurrence computation, a multi-pattern could be involved, for instance, 2-point to 2 point or 3-point to 3-point computation until m-point-m-point computation. Denoted mathematically by RP_4 , it was given by Eq. 1 for $Y_j = X_j$.

III. RESULTS

A. Application To Sine Wave

A sine wave of 200 points has been simulated. Moreover, in RP_2 , producing unbiased quantification required few primer computations. To select the optimal values of d and τ , we have solved the optimization problem given by Eq. 2, through minimizing the cost function $J(\theta_k)$.

$$\theta_k^* = \arg \min_{\theta} (J(\theta_k)), \quad (2)$$

where $\theta_k = (d_k, \tau_k)$ was the kth embedding dimension and time delay to be optimized and J was the number of false recurrence points defined as follows:

$$J(\theta_k) = \%CrossDiagonal = \frac{\sum_{a=a_{min}}^N aP(a)}{\sum_{i,j=1}^N RP(\theta_k)} \times 100, \quad (3)$$

where $P(a)$ was the number of cross-diagonal lines of length a , a_{min} the minimum length of cross-diagonal line [6] and $\theta_k=1$ in RP_3 and RP_4 .

Fig. 2 (top) represented the cost function as a function of d , while holding τ fixed to quarter the period, and (bottom) the cost function as a function of the time delay while holding d fixed to 2. As inferred from Fig. 2 (top), the first zero-crossing of J occurred at $d = 2$. Consequently, $d = 2$ was used in the

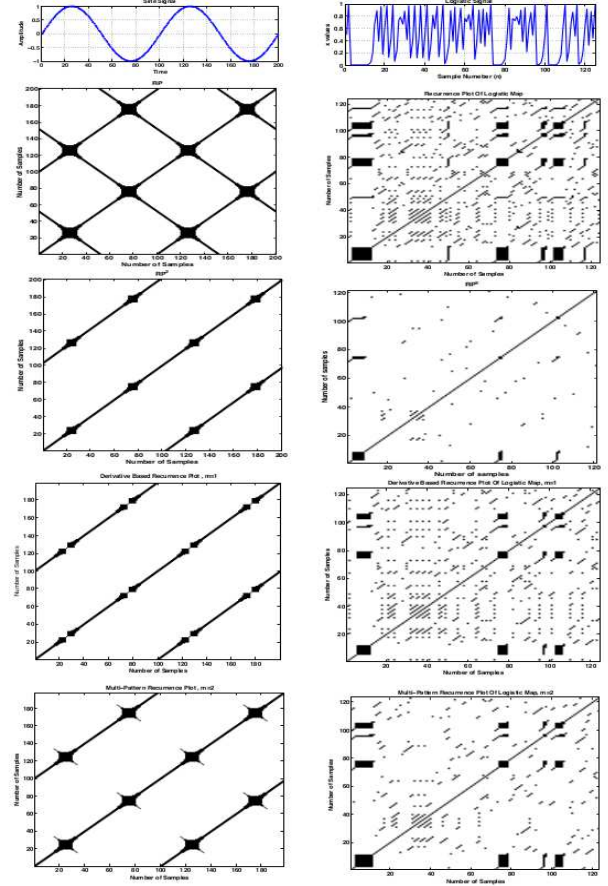


Fig. 3. RP_1 , RP_2 , RP_3 and RP_4 of (left) the simulated sine wave and (right) the Logistic signal.

optimization. Then τ was tested in the range $0 \leq \tau \leq 55$. This led to an optimized range rather than a unique value.

Note that the time-delay proposed in Taken's theorem, was verified in 2 (bottom) to be $(\tau = T/4)$ i.e. within the optimal range obtained. The solution of the minimization of the mutual information was a special case of the solution obtained by the minimization of the false recurrence function J . Consequently, it was not necessary to chose another value, i.e. $(\tau \neq T/4)$.

After applying the discussed techniques, the results were depicted in Fig.3 (left) as followed: RP_1 , RP_2 for $(\tau=T/4)$, RP_3 for $m=1$ and RP_4 for $m=2$. RP_1 in Fig.3 constituted few diagonal and cross-diagonal lines presenting periodicity. RP_2 revealed that the cross-diagonal lines, which were present in the first image, have vanished totally. However, the size of the diamond-shaped patterns have decreased as compared to RP_1 . RP_3 manifested how the cross-diagonal lines, which were present in RP_1 , have totally vanished. However, it showed a drawback which was the loss of the junction points, presence of gaps and a doubling in the number of diamond-shaped patterns. RP_4 , showed how the cross-diagonal lines have vanished when increasing the wavelength. Although sojourn points have approximately vanished, few points lying along the cross-diagonal were left intact. This was a sort of a drawback of RP_4 . As a global visual evidence, sojourn points have been

eliminated using RP_2 , RP_3 and RP_4 .

B. Application To Logistic Map

As a convention and in order to mimic dynamical biomedical systems, the four techniques were applied on the chaotic mathematical system, known as the Logistic Map. The time-series derived from the logistic map was represented by Fig.3 (top right) and defined as:

$$x_{n+1} = b * x_n * (1 - x_n), \quad (4)$$

where b was 2.8 and n , the number of points, was 200. Fig.3 (right) represented the RP, RP_2 for $\tau = 4$, RP_3 for $m=1$ and finally RP_4 for pattern $m=2$. RP_1 of the Logistic time-series x showed various small diagonal and cross-diagonal lines reflecting the chaotic nature of the simulated system. RP_2 revealed that almost all cross-diagonal lines have vanished, still, significant vertical lines and patterns have vanished too. RP_3 showed how the cross-diagonal lines which were present in the reference image of the RP have vanished. However, the other small structures remained unchanged. The RP_4 , revealed that once the wavelength increased, the cross-diagonal lines vanished, even though, there were non-negligible loss in the vertical information as compared to RP_3 . So sojourn points were well-eliminated by means of RP_3 and RP_4 of the Logistic signal.

To quantify the number of sojourn points, DET [7] and J cost-function were calculated. Table I represented the %DET values along the diagonal and J(% Cross-Diagonal) of values in RP_1 , RP_2 , RP_3 and RP_4 of a Sine and logistic signal. For a sine wave, %DET and J values of RP_1 were close. This was in synchronization with the theory, provided that, RP_1 was uniform. However, %DET of RP_2 , which was 80 %, has increased as compared to RP_1 and J which was 20%, have decreased. Specifically, 10% out of 50.3% cross-diagonal lines were detected, i.e., 5.0 % of sojourn points remained on the cross-diagonal lines and 90 % were eliminated. Moreover by RP_3 , J was 24%, i.e., 12 % out of 50% or 6.0 % of sojourn points remained and 76% were eliminated. Then J by RP_4 was 29%, i.e., 14.5% out of 50.3% remained and 71% were dropped out. RP_4 was capable of eliminating the sojourn point 5% more than RP_3 . This evidenced that mathematically the unbiased RP^4 quantification was the most sensitive.

For the logistic signal, from 63% by RP_1 to 61% by RP_2 the number of the points detected along the diagonal decreased, this could be due to some large diagonal lines that were transformed into separate discrete points; this was reflected in the increased number of points detected along the cross-diagonal lines. The trivial comparison of the cross-diagonal values with respect to the detected points forming the cross-diagonal lines obtained through the standard RP_1 shows that (i) 14.4% out of 37% cross-diagonal points were detected in RP_2 , (ii) 13.3% out of 37% cross-diagonal points were detected in RP_3 , however, in (iii) 13% out of 37% cross-diagonal points were detected in RP_4 .

Note that RP_2 was comparable with RP_3 . However, the calculation of RP_3 and RP_4 was time-effective and required no

TABLE I
SOJOURN POINT QUANTIFICATION BY %DET AND J OF RP_1 , RP_2 , RP_3
AND RP_4 OF A SINE AND LOGISTIC TIME SERIES.

Dynamic System	Sine Wave		Logistic Map	
	Diagonal	Cross-Diagonal (J)	Diagonal	Cross-Diagonal (J)
RP_1	49.7%	50.3%	63%	37%
RP_2	39.8%	5.0%	38.4%	5.3%
RP_3	37.8%	6.0%	40.3%	4.9%
RP_4	35.8%	7.3%	40.5%	4.8%

a priori information. They were directly manipulated from the time series, being in this work either the sine signal (or triangular signal) and the Logistic signal. As an overall, they did not drop out vertical or diagonal information as RP_2 . Moreover, even though RP_3 was advantageous over RP_4 in eliminating sojourn points, some true recurring points (junction points) were lost. This offsets that the technique had overestimated the quantification of sojourn points. Nevertheless, RP_4 was advantageous over RP_3 in the sense that all the diagonal information were preserved, anyhow, most of the sojourn points were eliminated. As well as RP_4 was better than RP_2 , such that no constraints were implicated, it preserved the size of junctions. There was always a compromise between the small cross-diagonal lines and junction points.

IV. CONCLUSIONS

It was possible throughout this work to establish unbiased quantification by eliminating sojourn points. These unbiased quantifications, have provided a tool for a clean RP which permits better analysis of chaotic dynamic systems. As a future prospect, we ought to validate the findings on real biomedical signals.

ACKNOWLEDGEMENTS

The authors are grateful to the Lebanese University and National Council for Scientific Research in Lebanon for supporting this work.

REFERENCES

- [1] F. Takens, "Dynamical Systems and Turbulence," *Lecture notes in mathematics*, Springer, 898, pp. 366–381, 1981.
- [2] J. P. Eckmann, S. O. Kamphorst, and D. Ruelle, "Recurrence plots of dynamical system," *Europhys. Lett.*, vol. 4, pp. 973–977, 1987.
- [3] N. Marwan, N. Wessel, U. Meyerfeldt, A. Schirdewan, and J. Kurths, "Recurrence-plot-based measures of complexity and their application to heart-rate-variability data," *Phys. Rev. E APS*, vol. 66, no. 2, 026702, 2002.
- [4] J. P. Zbilut, A. Giuliani, C. L. Webber Jr. and D. Ruelle, "Detecting Deterministic Signals In Exceptionally Noisy Environments Using Cross-Recurrence Quantification," *Europhys. Lett A*, no. 246, pp. 122–128, 1998.
- [5] N.H. Packed and J. P. Crutchfield, J.D. Farmer, R.S. Shaw, "Geometry from a time series," *Phys. Rev. Lett.* 45, vol. 246, no. (1-2), pp. 122–128, 1998.
- [6] C. D. Nguyen, J. S. Wilson and S. Crozier, "Automated Quantification of the Synchronogram by Recurrence Plot Analysis," in *IEEE Trans Biomed Eng, School of Information Technology and Electrical Engineering*, vol. 59, pp. 946-955, 2012.
- [7] J. Gao and H. Cai, "On the structures and quantification of recurrence plots," in *Physics Letters A*, vol. 270, pp. 1563–1572, 2000.